


H3899F Series

H3899 series standard precise slip ring with flange, integrated structure design, with through hole 38.1mm , OD99mm , suitable for rotating application which requires a through hole <=38.1mm (remark: if need a hole <38.1mm, can add a inner bushing)



Part No. description

<p>H:through hole slip ring 3899:ID 38mm, OD 99mm</p> <p>F:with rotor flange(optional)</p> <p>Example: 0610:6 circuits,10A per circuit 1220:2circuits,10A per circuit</p>		<p>H3899 - F - Power circuits no. - Signal circuits no. - Eproduct grade</p>	<p>Example: C: standard level D:Industrial level H:High quality level</p> <p>Example: 06S:6circuits signal (0~2A) 12S:12circuits signal (0~2A)</p>
---	--	--	--

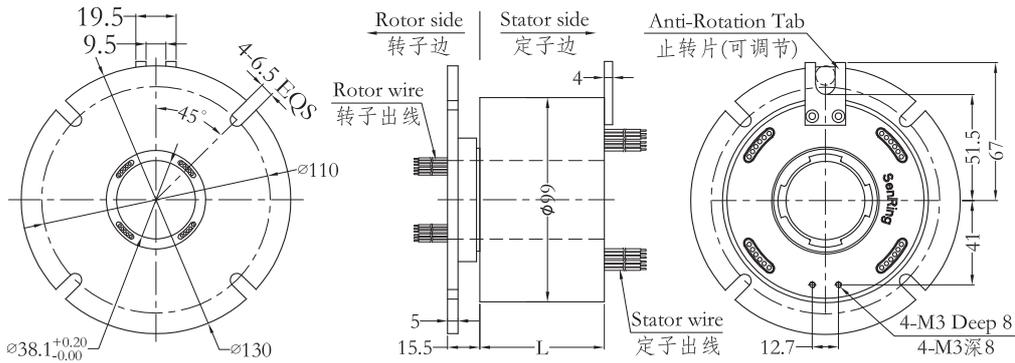

Standard Model List

H3899F series model list							
Part no.	Circuit		Length L(mm)	Part no.	Circuit		Length L(mm)
	10A	Signal or 0~5A			10A	Signal or 0~5A	
H3899F-02S	0	2	32	H3899F-1210-12S	12	12	120
H3899F-0210	2	0	32	H3899F-1810-06S	18	6	120
H3899F-03S	0	3	36	H3899F-2410	24	0	120
H3899F-0310	3	0	36	H3899F-30S	0	30	144
H3899F-06S	0	6	48	H3899F-0610-24S	6	24	144
H3899F-0210-04S	2	4	48	H3899F-1210-18S	12	18	144
H3899F-0410-02S	4	2	48	H3899F-1810-12S	18	12	144
H3899F-0610	6	0	48	H3899F-2410-06S	24	6	144
H3899F-12S	0	12	72	H3899F-3010	30	0	144
H3899F-0210-10S	2	10	72	H3899F-36S	0	36	168
H3899F-0310-09S	3	9	72	H3899F-0610-30S	6	30	168
H3899F-0610-06S	6	6	72	H3899F-1210-24S	12	24	168
H3899F-0810-04S	8	4	72	H3899F-3610	36	0	168
H3899F-1010-02S	10	2	72	H3899F-42S	0	42	192
H3899F-1210	12	0	72	H3899F-0610-36S	6	36	192
H3899F-18S	0	18	96	H3899F-1210-30S	12	30	192
H3899F-0210-16S	2	16	96	H3899F-48S	0	48	216
H3899F-0410-14S	4	14	96	H3899F-0610-42S	6	42	216
H3899F-0610-12S	6	12	96	H3899F-1010-38S	10	38	216
H3899F-0810-10S	8	10	96	H3899F-1210-36S	12	36	216
H3899F-1010-08S	10	8	96	H3899F-1810-30S	18	30	216
H3899F-1210-06S	12	6	96	H3899F-2410-24S	24	24	216
H3899F-1410-04S	14	4	96	H3899F-60S	0	60	264
H3899F-1610-02S	16	2	96	H3899F-0610-54S	6	54	264
H3899F-24S	0	24	120	H3899F-1010-50S	10	50	264
H3899F-0410-20S	4	20	120	H3899F-1210-48S	12	48	264
H3899F-0610-18S	6	18	120	H3899F-72S	0	72	312

*Remark:Circuits can be combined in parallel for bigger current, N circuits of 10A to get N*10A,such as 2 circuits of 10A in parallel for 20A use.10A circuits No. and signal circuits (5A) No. can be customized based on standard products,pls inquiry Senring for details.

Technical Specification

Mechanical		Electrical		
Spec	Data	Spec	Data	
Working life	pls refer to product grade table		Power	Signal
Rotating speed	pls refer to product grade table	Rated voltage	0~690VAC/VDC	0~440VAC/VDC
Working temp.	-30°C~80°C	Insulation resistance	≥1000mΩ/500VDC	≥1000mΩ/500VDC
Work humidity	0~85% RH	Lead wire spec	AWG17# Silver-plated teflon	AWG22# Silver-plated teflon
Contact material	pls refer to produce grade table	Lead wire length	standard 300mm(can be customized)	
Housing material	AL alloy	Dielectric Strength	800VAC@50Hz,60s	
Torque	0.1N.m (+0.03N.m/6circuits)	Electrical noise	<0.01Ω	
IP grade	IP51			

Product Grade Table

Grade code	Max rotating speed	Working life	Contact material
C:standard	400RPM	20millisons revolutions	precious metal
D:industrial	800RPM	60millisons revolutions	precious metal
H:high quality	1200RPM	150millisons revolutions	gold alloy

Color code of Lead Wire

ring#	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU
ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark:"1" : the first wire from rotor side , H3899F-06S wire color sequence: BLK/BRN/RED/ORG/WHT/GRN , 24 color wires as one group , if more than 24wires, repeat as sequence , use number tube to tell group 1#, 2#....