



K225 Integral Pancake Slip Ring

SenRing K225 series Pancake slip ring is a super thin slip ring, with hole size 25.4mm, thickness 22mm, OD ranges from 92mm~460mm. K225 series Pancake slip ring is mainly applied to those devices with limited space and strict limits of slip ring on thickness (height) but enough horizontal space(OD). Special vacuum sealing technology & precious metal brush ensure the high reliability transmitting and rotating performance of slip ring. With many advantages such as low torque, low friction, low electrical noise and long life. Standard models support 2-48 circuits 2~20A power/signal.


Part No. Description

K225 - power circuits - signal circuits - Product grade			
K series Pancake Slip Ring Hole size: 25.4mm; Thickness (height) 22mm			C: standard D: industrial
Examples: 0610: 6 circuits@10A 1210: 12 circuits@10A		Examples: 06S: 6 circuits signal@2A (5A options) 12S: 12 circuits signal@2A (5A options)	

Examples

K225-02S: K225 means K225 series Pancake slip ring (hole size 25.4mm, thickness 22mm), "02S" means 2 circuits signal;

K225-1210-08S: K225 means K225 series Pancake slip ring (hole size 25.4mm, thickness 22mm), "1210" means 12 circuits 10A each, "08S" means 8 circuits signal.

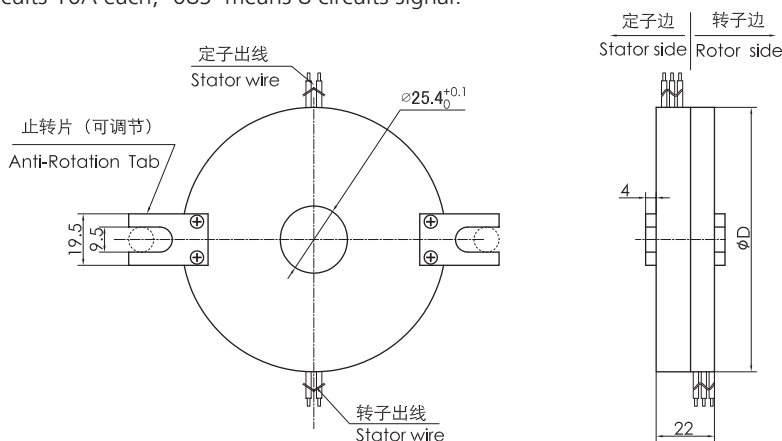

Model List

Model	signal/5A	10A	20A	OD(mm)
K225-02S	2	0	0	92
K225-0210	0	2	0	92
K225-0210-02S	2	2	0	108
K225-0410	0	4	0	108
K225-06S	6	0	0	124
K225-0610	0	6	0	124
K225-0620	0	0	6	124
K225-0210-04S	4	2	0	124
K225-12S	12	0	0	172
K225-1210	0	12	0	172
K225-1220	0	0	12	172
K225-0610-06S	6	6	0	172

Model	signal/5A	10A	20A	OD(mm)
K225-0620-06S	6	0	6	172
K225-18S	18	0	0	216
K225-1810	0	18	0	216
K225-0610-12S	12	6	0	216
K225-1210-06S	6	12	0	216
K225-0810-10S	10	8	0	216
K225-24S	24	0	0	268
K225-2410	0	24	0	268
K225-0610-18S	18	6	0	268
K225-1210-12S	12	12	0	268
K225-36S	36	0	0	364
K225-48S	48	0	0	460

*Remark: Circuits can be combined in parallel for bigger current, N circuits of 10A to get N*10A, such as 2 circuits of 10A in parallel for 20A use. If you need to customize the hole size, OD, thickness, circuit no. and signal type of slip ring, please contact the SenRing technician: 186 7557 7111.

Technical Specification of the slip ring

Mechanical Data		Electrical Data		
spec	data	spec	data	
working life	refer to slip ring grade table		power	signal
Rotating speed	refer to slip ring grade table	voltage range	0~440VAC/VDC	0~240VAC/VDC
working temp.	-30℃ ~80℃	insulation resistance	≥ 1000MΩ /500VDC	≥ 1000MΩ /500VDC
work humidity	0~85%RH	lead wire spec.	AWG17# Silver-plated teflon	AWG22# Silver-plated teflon
contact material	refer to slip ring grade table			
housing material	aluminum alloy	lead wire length	standard 300mm （can be customized）	
torque	0.1N.m;+0.03N.m/6 circuits	Dielectric Strength	500VAC@50Hz， 60s	
IP grade	IP51	Electrical noise	<0.01Ω	

Grade code

Grade code	Max rotating speed	working life	contact material
C: standard	60RPM	3 millions	precious metal
D: industrial	200RPM	10 millions	gold-gold

Color Code of Lead Wire

ring #	1	2	3	4	5	6	7	8	9	10	11	12
color	BLK	BRN	RED	ORG	YEL	GRN	BLU	PUR	GRY	WHT	PINK	LGT BLU

ring#	13	14	15	16	17	18	19	20	21	22	23	24
color	WHT/BLK	WHT/BRN	WHT/RED	WHT/ORG	WHT/YEL	WHT/GRN	WHT/BLU	WHT/PUR	WHT/GRY	BLK/RED	BLK/BRN	Transparent

Remark: "1" : the first wire from rotor side, K225-06S wire color sequence: BLK/BRN/RED/ORG/YEL/GRN, 24 color wires as one group, if more than 24 wires, repeat as sequence, use number tube to tell group 1#, 2#....